

- Withstand temperatures upto 200°C
- Available in outputs upto 50W/m
- Can be cut to length at site
- Particularly suited to small bore pipework
- Full range of controls and accessories
- Available for 110/120 and 220/240VAC
- Highly flexible

### FEATURES

Microtracer type EMTS is a medium temperature parallel resistance, constant wattage, cut-to-length heating tape that can be used for freeze protection or process heating.

It is particularly suited to refrigeration applications or for small bore instrument lines or process pipework located in non-hazardous areas.


Microtracer type EMTS is chosen when short or moderate circuit lengths are required (select Minitracer if longer circuits are required).

The silicone rubber insulation is particularly suited to applications where great flexibility is required.

The installation of EMTS heating tape is quick and simple and requires no special skills or tools. Termination and power connection components are all provided in convenient kits.

### OPTIONS

- EMTS..C Tinned Copper braid provides mechanical protection for base heater and may be used when traced equipment does not provide an effective earth path.
- EMTS..CS Silicone rubber overjacket over tinned copper braid provides additional protection.
- EMTS..CF Fluoropolymer overjacket over tinned copper braid provides protection where corrosive chemical solutions of vapours may be present.

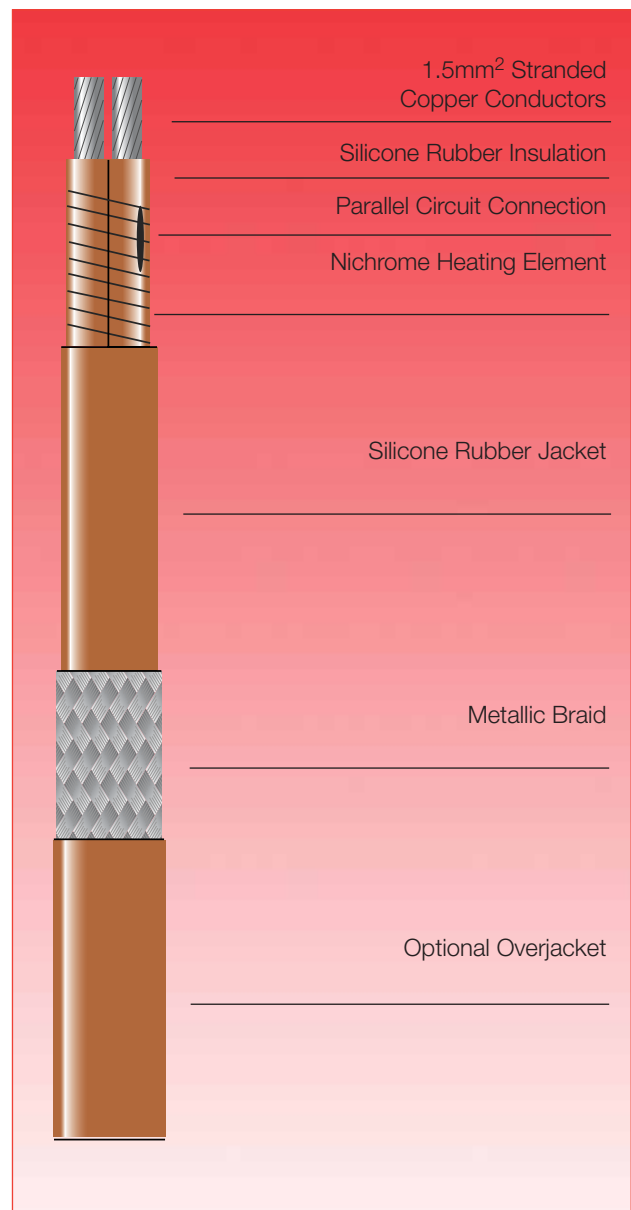

## SPECIFICATION

<b>MAXIMUM TEMPERATURE</b>	Un-energised 200°C(392°F) Energised See Table
----------------------------	--

<b>MINIMUM INSTALLATION TEMPERATURE</b>	-80°C (-112°F)
---	----------------

<b>POWER SUPPLY</b>	220 - 240 VAC or 110 - 120 VAC
---------------------	-----------------------------------

<b>MAXIMUM RESISTANCE OF PROTECTIVE BRAIDING</b>	18.2 Ohm/km
--	-------------

### WEIGHTS & DIMENSIONS

Type Ref	Nom. Dims. (mm)	Weight kg/100m	Min. Bending radius (mm)	Gland Size
EMTS	8.2 x 6.0	7.4	10	M16
EMTS..C	9.0 x 6.8	11.7	12	M16
EMTS..CS	11.0 x 8.8	14.3	15	M20
EMTS..CF	10.2 x 8.0	14.3	25	M20

### CONSTRUCTION

Grade	2.2 to BS6351:Part 1
Heating Element	Nickel Chromium
Power Conductors	Tin Plated Copper 1.5mm <sup>2</sup>
Conductor Insulation	Silicone Rubber
Jacket	Silicone Rubber
Braid	Tinned Copper
Overjacket (Optional)	Silicone Rubber or Fluoropolymer (FEP)

### ORDERING INFORMATION

Example	23EMTS2-CS
Output 23W/m	
Microtracer type EMTS	
Supply Voltage 220 - 240 VAC	
Tinned Copper Braid	
Silicone Rubber overjacket	

### ACCESSORIES

Heat Trace supply a complete range of accessories including termination/splice kits, end seals, junction boxes and controls. These items are recommended for the correct operation of EMTS products.

### FURTHER INFORMATION

Please consult the appropriate termination instructions and the Heat Trace Installation, Maintenance and Testing Manual (IMEHT010) for further details.

### MAXIMUM PIPE / WORKPIECE TEMPERATURES

The surface of the heater must not exceed the maximum withstand temperature of its constructional materials. This is ensured by limiting the pipe or workpiece temperature to a safe level either by design calculation (a Stabilised Design) or by means of temperature controls.

For worst case conditions, the temperature of steel pipes should be limited to the following levels:-

### MAXIMUM PIPE/WORKPIECE TEMPERATURES (°C)

HEATER NOMINAL OUTPUT (W/m)	MAXIMUM PERMISSIBLE PIPE TEMP (°C)			
	EMTS	EMTS-C	EMTS-CS	EMTS-CF
6.5	190	190	190	190
13	180	180	185	185
23	150	150	160	160
33	110	110	115	115
50	70	75	80	75

For conditions other than worst case, or pipes of other materials (eg. Plastic, Stainless Steel, etc.), consult Heat Trace

Tolerances: Voltage +10%; Resistance +10%; -0%

Pipe temperatures higher than those given above may be accommodated by using Heat Trace Ltd voltage compensating devices eg. POWERMATCH™ - call for further details.

### MAXIMUM CIRCUIT LENGTH

OUTPUT (W/m)	MAX. CIRCUIT LENGTH*		ZONE LENGTH (NOM.)	
	115V	230V	115V	230V
6.5	82m	164m	1000mm	1500mm
13	58m	116m	741mm	1100mm
23	44m	87m	900mm	1000mm
33	36m	73m	1000mm	950mm
50	30m	59m	995mm	900mm

\*For ±10% end-to-end power output variation

### POWER CONVERSION FACTORS

115V HEATING TAPE		230V HEATING TAPE	
277V	Multiply output by 5.80	277V	Multiply output by 1.45
230V	Multiply output by 4.00	240V	Multiply output by 1.09
208V	Multiply output by 3.27	220V	Multiply output by 0.91
120V	Multiply output by 1.09	208V	Multiply output by 0.82
110V	Multiply output by 0.91	115V	Multiply output by 0.25



Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, UK  
Tel: +44(0)1928 726 451 Fax: +44(0)1928 727 846 <http://www.heat-trace.com>

The information given herein, including drawings, illustrations and schematics (which are intended for illustration purposes only), is believed to be reliable. However, Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.